

Product information | TECHNICAL DATA SHEET

TEAK OIL

400 ml, 10 Oz, 287 g.

GENERAL DESCRIPTION

Mixture of oils and natural resins, specially selected to nourish and enrich wood. Highly efficient thanks to the exclusive raw materials that produce outstanding performance for wood hydration.

FEATURES

- Very Nourishing.
- Mitigates the effects of aging.
- Silky texture.
- Soft and natural tone.
- Easy to apply and recoat.
- Very good penetration in the wood.

APPLICATIONS

For wood and garden furniture maintenance and renovation, especially on exotic and tropical, unvarnished woods (teak, iroko). Recovers shine, texture, and colour, and also repairs woods tendency to dry out and turn grey when exposed to sun, protecting it from stains and dust.

INSTRUCTIONS FOR USE

- Shake the aerosol well before using.
- Apply to clean, dry surfaces, directly on the wood.
- Remove stains and dust. For previously painted or varnished wood, remove paint and/or varnish before treatment with the product. Wait approximately thirty minutes, remove the excess product with a cloth, and apply a second coat.
- Turn the aerosol upside down to clean out the valve after use.
If the nozzle becomes blocked replace it with a new one.
- Never apply to equipment that is plugged in and use in well ventilated areas.
- Request safety datasheets.

PHYSICAL PROPERTIES

Color:	Colorless
Drying:	3-4 Hours
Theoretical Coverage :	2 m ²
Thinner:	Butyl Acetate
Recoating:	30'
Product life:	(Well Stored) 10 years

* Adherence tests were performed on steel.

CAUTION




APPEARANCE

DONUT
Indicates the paint color.



LID
Protects the valve and the nozzle.

LABEL

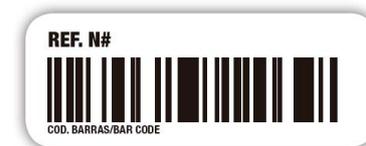

EX014PR1052 Teak Oil

CAP SYSTEM



PACKAGING

Nominal capacity 400 ml.
Heat resistance of packaging: <50°C
Propellant: DME

Box (6 units)
205 X 140 X 200 mm.

